

# Technical data

## D9 mounted and AD harrow-mounted seed drills

| Model  | D9 2500 Special | D9 3000 Special | D9 3000 Super  | D9 3500 Super  | D9 4000 Super  | D9-60 Super    | D9 9000-2T     | D9 12000-2T    | AD 3000 Super |
|--|-----------------|-----------------|----------------|----------------|----------------|----------------|----------------|----------------|---------------|
| Working width <sup>2</sup> (m)               | 2.50            | 3.00            | 3.00           | 3.50           | 4.00           | 6.00           | 9.00           | 12.00          | 3.00          |
| WS coulters: number of rows                  | 15/21           | 18/25           | 18/25          | 21/29          | 24/33          | 48/60          | –              | –              | –             |
| WS coulters: row spacing (cm)                | 12.0/16.6       | 12.0/16.6       | 12.0/16.6      | 12.0/16.6      | 12.0/16.6      | 12.5           | –              | –              | –             |
| RoTeC coulters: number of rows               | 15/17/21        | 18/21/25        | 18/21/25       | 21/25/29       | 24/29/33       | 48             | 54/63/75       | 72/87/99       | 24            |
| RoTeC coulters: row spacing (cm)             | 12.0/14.7/16.6  | 12.0/14.3/16.6  | 12.0/14.3/16.6 | 12.0/14.0/16.6 | 12.0/13.8/16.6 | 12.0           | 12.0/14.3/16.6 | 12.0/13.8/16.6 | 12.5          |
| Hopper capacity without extension (l)        | 360             | 450             | 600            | 720            | 830            | 1,200          | 1,800          | 2,490          | 600           |
| Hopper capacity with extension (l)           | –               | 850             | 1,000          | 1,200          | 1,380          | 1,720<br>2,000 | 3,000          | 4,140          | 1,000         |
| Weight with WS coulters <sup>1</sup> (kg)    | 630             | 690             | 780            | 918            | 1,070          | 1,540          | –              | –              | –             |
| Weight with RoTeC coulters <sup>1</sup> (kg) | 710             | 760             | 850            | 1,010          | 1,180          | 1,700          | 5,950          | 7,060          | 747           |


<sup>1</sup>Weight of base machine with mechanical coulters pressure adjustment, Exact harrow, track markers and tramline control

<sup>2</sup>The actual working width can deviate up to a maximum of 3.2 cm, depending on coulters type

Illustrations, content and technical data are not binding and may differ depending on the level of equipment. Country-specific road traffic regulations apply and must be complied with, meaning that special approval may be required. The permissible axle loads and total weights of the tractor should be checked. Not all the listed combination options are possible with all tractor manufacturers.



**1948**  
First seed drill:  
the D1 seed drill

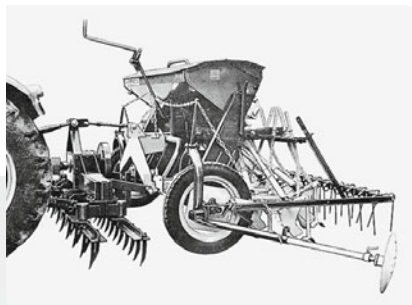

**1967**  
First modern sowing combination with  
reciprocating harrow: the RE-D4



**2016**  
The latest generation of the conventional  
sowing combination: the Cataya